



Your phone


Your Cellhire phone has been quality checked and tested and both batteries are fully charged.

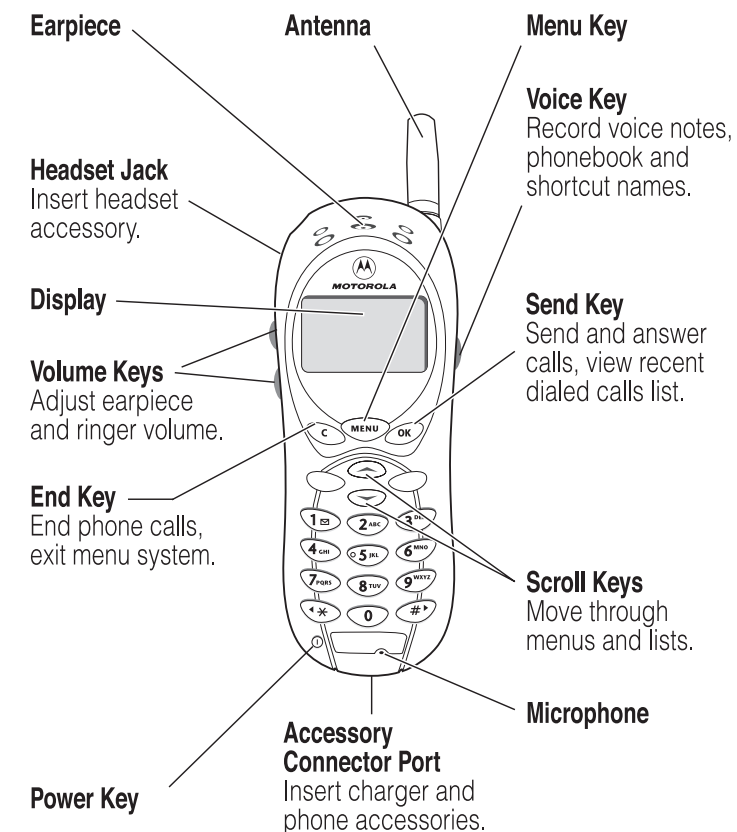

Inserting / changing the SIM card
(If you have ordered your phone with airtime, your SIM will already be inserted in the phone).



Remove the back cover from the phone. With the back of the phone facing you, push the back cover release button and slide the back cover down and off. Then remove the battery by pushing it towards the top of the phone and lifting it up with the finger grip.



To release the SIM card holder

If using a T-250, press the area just above the SIM that says "press" and slide the SIM up and out. If using an L series phone, slide the SIM door to the left of the handset and lift up.

Insert the SIM card into the SIM card holder, ensuring that the golden contact areas on the SIM and phone are touching.

Close the SIM card holder and press until it snaps into position, insert the battery and slide the cover back into place.

To power phone on / off

Press and hold the button in the lower left front corner of the phone until the phone powers on.

Repeat to switch off.

Keypad lock

Press the and keys at the same time. The screen will read KEYS LOCKED.

Repeat to unlock.

Set the time and date

In standby mode, press the menu key and select PHONE SETUP, EXTENDED MENUS, and turn on the extended menus. Scroll down to SET TIME AND DATE.

Enter the current time in 24 hour format and press OK.

Enter today's date using the keypad and press OK.

Charging the battery

Connect the lead from the charger to the socket on the bottom of your phone then connect the charger to a wall socket.



You may need to use a plug adaptor for the wall socket relevant to the country you are in. This is included in your rental pack.

Charging can take up to 1 hour 30 minutes in standby mode.

You can use the phone while the charger is connected.

Answering / ending calls

To answer a call, press .

To end a call, press .

Making calls

To make an emergency call

Dial 112, or dial 911 if you are using a US number.

To redial the last number called

Press scroll to the number you wish to call, press .

To make a domestic call

Dial CITY/AREA CODE then PHONE NUMBER and press to send the call.

E.g. Domestic call in the US, dial: 214 355 5200.

To make an international call

Press and hold the key until the + sign appears on the screen.

Dial COUNTRY CODE then CITY/AREA CODE then PHONE NUMBER and press to send call.

(COUNTRY CODES are listed overleaf. The CITY/AREA code of most countries outside of North America begins with 0. This 0 should be omitted when dialing).

E.g. International call to the UK, dial: +44 207 123 1234.

Phone book

Saving contacts

In standby mode, press the menu key then select PHONE BOOK, PERSONAL NUMBERS and ADD ENTRY. Select either ADD TO PHONE MEMORY or ADD TO SIM MEMORY. Key in the contact's phone number and press . Key in the contact's name and press . You will then be asked to enter a LOCATION. Enter 1-100 for phone memory, or 101-255 for SIM memory, then press .

Searching for / calling a contact

In standby mode, press the MENU key and select PHONE BOOK and PERSONAL NUMBERS.

You can search either by name or location.

When you have highlighted the contact you wish to call press .

Select CALL NUMBER and press .

One Touch Dialing

The numbers saved in the phone memory locations 1 to 9 and SIM memory locations 101-109 are available to you for one touch dialing.

Select either phone or SIM memory for one touch dialing.

In standby mode, press the MENU key and select PHONE BOOK and ONE TOUCH-DIAL. Select either PHONE MEMORY or SIM CARD MEMORY to be available for one touch dialing.

To make a one touch call

To dial a number stored in the first nine locations of your Phone Book, press and hold the appropriate digit key. For example, pressing and holding the number 2 key will dial the phone number stored in location 2 of your Phone Book. You do not need to press to call the number.

Text Messages (SMS)

Creating an SMS

In standby mode press MENU and select MESSAGES and MESSAGE EDITOR.

Key in the message using your keypad.

To send the message, press and select SEND MESSAGE and enter the recipient's phone number or search for the phone number in the phone book.

Press to send.

Reading / replying to an SMS

When you have received an SMS, an envelope symbol will be shown on the screen.

Press to view the message or press to view it later.

Reading the message later:

Press MENU and select MESSAGES and RECEIVED MESSAGES.

Scroll to the message you want to read and press .

Retrieving your VoiceMail messages:

If your phone does not pick up a signal please try the following:

From within the US:
Dial 123.

From outside the US:
Enter the + sign on your phone screen, then dial 1 and your cell phone number.

Alternatively, dial +1 805 6377243 and activate the call.

When prompted, enter your ten digit mobile number. Interrupt the greeting by pressing the * key. When prompted enter PIN code 3333.

Additional Information

For further information, please visit www.cellhire.com and click support.

Network Selection

- Press **MENU** and select Network Selection and press **OK**
- Highlight Change Band and press **OK**
- Select the correct band:
 1. 900/1800 – for use outside of the Americas
 2. 1900 – for use within the Americas*
- Press **OK**

*Note: South American countries utilize all three bands. If you do not find a signal on the 1900 band, try 900/1800.

Manual Network Search

Your Motorola handset should automatically pick up a signal when you reach your destination. If there is no signal present and you are on the correct band, please try the following:

- Press **MENU** and scroll to Network Selection and press **OK**
- Select Available Networks
- The screen will now say Scanning.
- Highlight the appropriate network when the network list is displayed and press **OK**. Please register onto this network by pressing **OK**.

If using your own SIM card please contact your Service Provider to determine whether or not service is provided for the country (ies) in which you are traveling. Please ensure that you activate international roaming on your SIM before traveling.

International country codes

Australia	61
Austria	43
Belgium	32
Brazil	55
Canada	1
China	86
Finland	358
France	33
Germany	49
Greece	30
Hong Kong	852
Italy	39
Japan	81
Netherlands	31
Norway	47
Portugal	351
Russia	7
South Africa	27
Spain	34
Sweden	46
Switzerland	41
Taiwan	886
UK	44
US	1

Cellhire has pre-arranged procedures to collect your equipment, simply follow the instructions below.

Step 1: Place your equipment in the enclosed return bag. Be sure to use the bubble-wrap that was sent with the equipment.

Step 2: Take note of your FedEx tracking number displayed at the beginning of this instruction booklet with your Cellhire number.

Step 3: Call FedEx at 1 800 GO FEDEX or 1 800 463 3339 and request pickup. If you are staying in a hotel, please ask the front desk or concierge to arrange FedEx pickup.

Please note: The customer is responsible for the equipment until FedEx scans the package. If the FedEx Representative asks you for an account number, simply tell them that you are returning the package via a Billable Stamp.

Please return your equipment from the US. Any international shipments billed to Cellhire's account will be subject to a collection fee.

Please note that Saturday pickups are subject to a \$10.00 fee.

Your FedEx tracking number is displayed at the beginning of this instruction booklet with your Cellhire number.

Important: The equipment is the customer's responsibility until it is scanned and collected by the courier. Any lost package without proof of courier collection is the sole responsibility of the customer.

Lost / stolen equipment

If your equipment is lost or stolen you must call Cellhire immediately on: + 1 214 355 5200. All calls made are the responsibility of the customer until the theft / loss is reported to Cellhire.

24 Hour Global Support

International: +1 214 355 5200 (US)
US toll free*: 1 888 476 7368
E-mail: support@cellhire.com

*From a US landline only

For on-line support, please visit www.cellhire.com and click support.

Thank you for renting from Cellhire.